

Journal of Engineering Technology and Applied Physics

Challenges and Advances in Boundary Layer Control on Aerodynamic Flow

Evyan Yang Chia Yan^{1,*}, Hethika Haridharan², Ahmed Ammar Irfan², Athi Shangker², Espadilla Lance Andrei², Lohein Rao², Jei Vincent³ and Siva Marimuthu⁴

¹Centre for Research and Postgraduate Studies, Nilai University, 71800 Nilai, Malaysia.

²School of Aircraft Maintenance, Faculty of Aviation, Science and Technology, Nilai University, 71800 Nilai, Malaysia.

³Department of Applied Physics, Faculty of Science and Technology, National University, 43600 Selangor, Malaysia.

⁴Aeronautical Engineering, School of Digital, Technologies and Arts, University of Staffordshire, England.

*Corresponding author: evyanyang@nilai.edu.my, ORCID: 0000-0003-0619-1103

<https://doi.org/10.33093/jetap.2025.7.2.11>

Manuscript Received: 15 April 2025, Accepted: 11 June 2025, Published: 15 September 2025

Abstract—Boundary layer control (BLC) is essential for enhancing an aircraft's overall performance, stability, and efficiency. It contributes to increased lift generation, decreased drag, and improved flying stability when controlled appropriately. The review outlines the challenges and recent advances in BLC techniques within the context of aerodynamic flow. This is to provide a clear understanding of advantages and limitations associated with different BLC strategies. The traditional BLC techniques, including suction, blowing, and vortex generators, have limitations and drawbacks that can cause major repercussions. The review compares the modern developments in BLC while high-lighted key challenges such as energy cost, durability and scalability. Suggestions for future improvement include hybrid control systems that combine passive and active elements, model predictive control (MPC), artificial intelligence (AI), and real-time monitoring via the Internet of Things (IoT) to overcome these constraints. From this comparative and forward-looking approach, a better airplane performance and sustainability flying can be resulted through increasingly intelligent and effective BLC systems.

Keywords—Hybrid control system, Model Predictive Control (MPC), Artificial Intelligence (AI), Sustainability.

I. INTRODUCTION

In aerodynamics, "aerodynamic flow" refers to the movement of air around an object, while a "boundary layer" is a thin layer of air that directly touches the object's surface, experiencing significant friction due to its interaction with the solid surface as in Fig. 1.

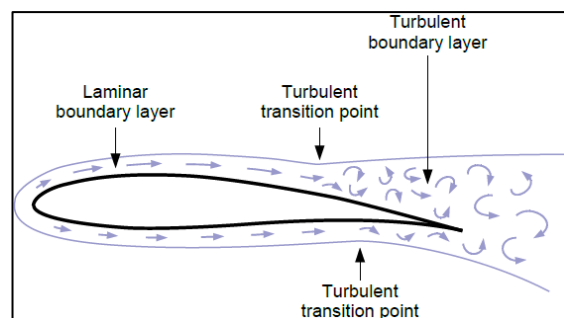


Fig. 1. Boundary layers in laminar and turbulent aerodynamic flows [1].

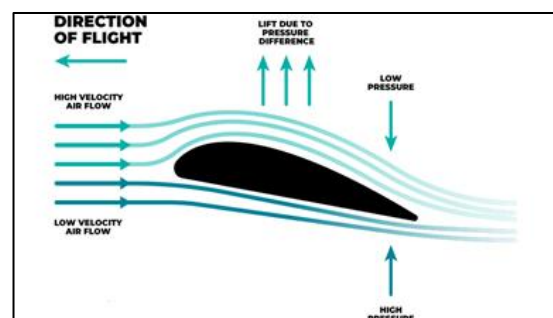


Fig. 2. The generation of lift based on Bernoulli's Principle [2].

The boundary layer significantly impacts a lifting surface, like an aerofoil, by influencing the pressure distribution around the wing, which directly affects the amount of lift generated which can be explained by Bernoulli's Principle. A thick or turbulent boundary layer can lead to flow separation, causing a substantial

loss of lift and increased drag, potentially resulting in a stall condition if severe enough as in Fig. 2.

II. FACTORS AFFECTING BLC

The skin friction can be reduced by maintaining the boundary layers in the laminar state, thus, the methods of controlling the behaviour of fluid flow within the boundary layers, namely Boundary Layer Control (BLC) is the key component for reaching optimized aerodynamic performance [3]. There are few main factors affecting the BLC including flow velocity, pressure gradient, surface geometry Reynolds number, temperature and viscosity.

In the aspect of surface geometry, the desired geometry and shape of the surface are those created laminar flow. The curvature, surface roughness and shape influence the layer behaviour. In the recent study [4], geometric parameters such as height and spacing were assessed to study the boundary layer behaviour of a NACA4415 airfoil using vortex generators to explore the passive flow control. In general, smooth, gradual contours help to maintain attached flow meanwhile sharp edges and sudden changes of geometric angle can cause flow separation. Reynolds number (RN) is the ration of inertial to viscous forces within a fluid and it indicated the laminar or turbulent nature of a flow. The higher values of the RN, the higher rate of turbulent of the flow. To emphasize the significance of RN in BLC application, Shi's research group analysed the aerodynamic characteristics of a new variable inlet guide vane by varying RN and clearance flows [5]. The effect of RN can be investigated using direct numerical simulations nowadays, especially on very high velocity of flight, boundary layers on supersonic aircrafts which the real-time condition may be complicated to be measured [6].

In addition, flow velocity plays an important role in affecting the type and behaviour of the boundary layers. The shear will be increased and the separation of boundary layers will be narrowed when the velocity of the fluid is high [7]. Pressure gradient also another factor to be encountered in BLC. In a favourable pressure gradient, the pressure decreases moving downstream to keep the flow attached and vice versa in an adverse pressure gradient to lead to flow separation. Julian *et al.* [8] conducted experimental and numerical analysis on porous bleed control for supersonic and subsonic flows with managing the adverse pressure gradients. The findings in the same study validate the experimental and numerical results are similar in controlling boundary layers for porous bleed in supersonic condition while the flow momentum near the wall is improved by boundary-layer bleeding. Temperature and viscosity of flow closely related to pressure that affect the density of the air and resulted the viscosity accordingly. In their study, the porous bleed systems are analysed by varying thermal condition which concluded that

viscosity of fluid is reduced on surfaces and fluids at higher temperature and this may delay the separation [8]. This findings in agreement with the theory by Gordon [9]. He also mentioned about higher ambient turbulence could trigger transition of turbulence in the boundary layers prematurely at higher ambient turbulence in free stream.

On the other hand, other factors can affect the BLC based on wall motion or vibration, surface suction or blowing rate which may slightly or more affect the boundary layers accordingly in aerodynamic performance [8, 10, 11]. The factors that affecting BLC are displayed in Fig. 3.

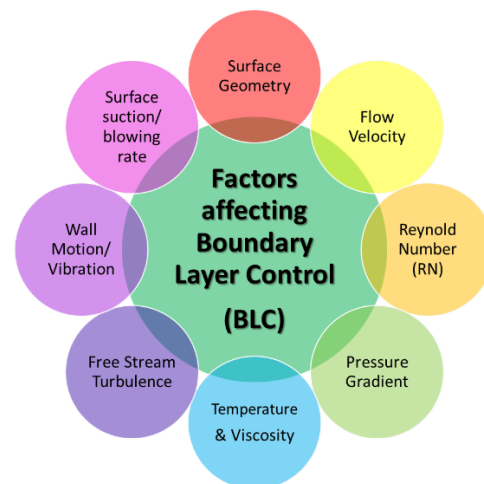


Fig. 3. Factors that must be concerned in the boundary layer control (BLC) system.

III. THE IMPORTANCE AND ADVANTAGES OF BLC

Boundary layer control on an aircraft is critically important for improving aerodynamic performance, fuel efficiency, and overall flight safety. Maintaining a proper control over boundary layers prevents fluid from separating before reaching its planned earliest departure point. Boundary layer control functions as the essential basis for modern aerodynamic design work that achieves top operational performance standards for different purposes [11]. Border layer control has a fundamental impact that exceeds the reduction of drag and increased lift performance to support environmentally safe operations. It reflects directly BLC play a role in sustainable future.

Effective BLC procedures implemented by engineers reduce aircraft drag rates and maximize fuel efficiency by preventing flow separation before its designated exit point. Suction-based platforms within laminar flow control systems expand laminar flow coverages across larger areas to decrease skin friction drag levels [12]. These drag reduction techniques lead to significant savings in fuel expenses while reducing greenhouse gas emissions that occur in commercial airplane operations. In short, the importance and advantages of BLC is summarized in Table I.

IV. THE EFFECTS OF FAILURES IN BLC

Stability issues and problems in controlling can be resulted by the failure of boundary layer control. The root cause of stability issues of aircraft mainly depending on airflow patterns which directly reflected on boundary layers during take-off, landing conditions, and high-speed flight operations [13].

When boundary layer not under control and separation takes place, aircraft will not safe to fly because it causes unexpected handling problems, including structural buffeting, lost control surface responsiveness, and potential stall situations. Flight

control becomes challenging due to these adverse effects, raising the chances of flight instability and accidents for pilots [14]. Thus, it is vital to have a good BLC system.

In general, it produces damaging effects that put stress on the overall aircraft structure. When aircraft experience boundary layer control failure. The unpredicted separation of airflow from aircraft surfaces causes unbalanced pressure distributions, creating higher amounts of structural loads [15]. The unexpected loads from boundary layer control failure

Table I. Importance and advantages of BLC in aviation.

Key element	Importance	Effect of control	Advantage	Reference
Drag reduction	The boundary layer contributes to skin friction drag and pressure drag	By managing the boundary layer (e.g. delaying flow separation)	Total drag is reduced, improving fuel efficiency and performance	[16, 17]
Delay of Flow Separation	Flow separation causes a sudden increase in drag and possible loss of lift	Techniques like suction, blowing, or vortex generators	Keeping the boundary layer attached to the surface longer, maintaining lift and preventing stall	[14, 18, 19]
Enhanced Lift	A more stable boundary layer can improve the effectiveness of high-lift devices (flaps, slats)	Allows aircraft to take off and land at slower speeds	Improving low-speed performance and short-field capability	[20 - 22]
Improved Maneuverability and Control	Uncontrolled boundary layer separation can lead to control surface ineffectiveness	Ensures consistent airflow over control surfaces (like ailerons and rudders)	Enhancing pilot control	[23, 24]
Fuel Efficiency	Lower drag	Less thrust is needed	Fuel savings and reduced operating costs	[25, 26]
Thermal Management (particular at high speed)	At supersonic speeds, the boundary layer influences surface heating	Advanced BLC system helps to manage thermal loads	Prevent structural damage	[15, 27]
Passenger Comfort	Boundary layer control over the fuselage and wings	Laminar flow control smooths airflow and reduce aerodynamic noise	Less buffeting, fewer sudden motions, improving ride quality and more pleasant cabin environment	[28, 29]
Operational and Safety Risks	Reduced stall risk during take-off and landing at critical safety phases	Delaying flow separation keeps lift high at low speeds	Stall recovery and improved Control During Emergencies	[30]

shorten the lifespan of essential aircraft parts, requiring aircraft maintenance and component repairs to happen more frequently. Exposure to such conditions eventually destroys the airframe integrity, creating operational costs that increase along with no safety threats to passengers [31]. Proper boundary layer control establishes one of the crucial requirements to lower aircraft structural stress and extend aircraft service longevity.

The failure of maintaining BLC integrity creates cabin noise which cause negative effects on passenger [32]. Off-stable airflow patterns near the aircraft surface produce turbulence that results in vibration and drastic altitude changes. These disturbances produce an uncomfortable experience, resulting in both

passenger motion sickness and elevated feelings of anxiety [29]. Controlled airflow provides passengers with a more stable experience while decreasing complaints, which improves airline reputation.

The safety of operations and running costs suffer detriment due to these issues. The associated breakdown of boundary layer control systems creates greater stress on aircraft structure and reduces comfort levels for passengers [30]. Aerospace engineers and maintenance personnel need to establish a reliable boundary layer management system that defends flight performance while ensuring aviation safety. Boundary layer control greatly affect the safety because it determines aircraft performance output alongside operational risk management [33].

V. LIMITATIONS AND CHALLENGES OF CONVENTIONAL BOUNDARY LAYER CONTROL SYSTEM

Conventional boundary layer control methods, including suction, blowing, vortex generators, and compliant surfaces have been used to manipulate boundary layer behaviour. Despite their various merits, there are serious limitations and challenges in terms of efficiency, implementation, and long-term sustainability in the conventional boundary layer.

High energy consumption is a major drawback of most conventional BLC techniques, such as suction and blowing, which involve the consumption of high amounts of energy. For instant, suction-based systems rely on vacuum pumps or compressors, which have very high-power consumption and are therefore inefficient for use over long periods of flight [34]. Complexity and maintenance issues arise as implementing traditional boundary layer control mechanisms often adds complexity to aircraft structures. Suction and blowing systems involve additional ductwork, pumps, and sensors, increasing the chances of mechanical failure and maintenance requirements [35]. Weight penalty is another significant challenge, as all conventional boundary layer control systems lead to increased weight due to components such as piping, pumps, and actuators, raising the gross weight of the aircraft [36]. This added weight greatly offsets any drag reduction advantages attained, making most of these systems inefficient in practical use today.

Limited effectiveness under adverse conditions is another concern, as almost all conventional boundary layer control systems are ineffective in changing atmospheric conditions [37]. such as turbulence, icing, or contamination effects from dust and debris. Suction-based techniques might have clogged perforations, and their effectiveness is diminished at high-altitude conditions. Cost constrictions also present a major challenge, as traditional boundary layer control systems can be quite expensive to implement and maintain [38]. Since such techniques require supplementary mechanical means and energy input, their operation has been especially costly for commercial aviation and application in industries.

Integration with modern aircraft designs remains a challenge, as modern aircraft are designed with strict weight and energy efficiency considerations. Integrating traditional boundary layer control [39]. techniques without compromising either the structural integrity or the performance of the aircraft remains an ongoing issue. Environmental impact is another concern, as most conventional methods in boundary layer control require high-pressure air or fluid injection, creating potential environmental hazards [34]. Key issues with such systems include noise pollution and inefficiency in energy utilization.

The conventional boundary layer control systems have played an important part in aerodynamics by providing techniques for drag reduction and performance improvement. However, they are associated with several disadvantages, including high energy consumption, weight penalties, cost constraints, technical challenges, integration issues with modern aircraft and environmental hazards as summarized in Fig. 4. Advancement and improved techniques are required to overcome the challenges.

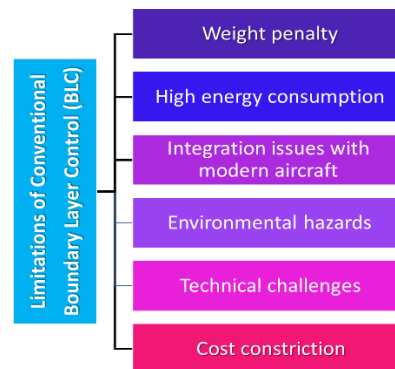


Fig. 4. The limitations of the conventional boundary layer control (BLC) system.

VI. RECENT ADVANCEMENT IN THE BOUNDARY LAYER CONTROL

Boundary control systems have evolved tremendously over time, beginning with manual tuning methods and later transforming into intelligent and adaptive technologies. Such systems are vital for engineering applications in aerospace, fluid dynamics, and structural engineering. The progression in boundary control systems has primarily been driven by demands for efficiency, reliability, and adaptability in complex and dynamic scenarios.

The alternative emerging technologies such as active flow control, plasma actuators, and bio-inspired aerodynamic design methods place increasing competition on conventional boundary layer control techniques. These emerging technologies are considered possibly more effective, lightweight, and less costly for some missions than the older concepts.

The new imbedded technologies and recent advancement in BLC is listed in Table II for insight of the advancement based on recent studies. By relating Table II with Fig. 4, most of the challenges are expected to be overcome by research study into smart materials, adaptive control systems, and energy-efficient methods of actuation in the quest to improve the effectiveness and efficiency of boundary layer control techniques.

VII. CONCLUSION

The review underscores the important roles of BLC in enhancing aerodynamic performance of aircraft. The BLC system offers notable advantages in terms of drag reduction, improved lift and flow stability meanwhile it provides significant limitations

such as high energy consumption, weight penalties, cost constraints, technical challenges, integration issues with modern aircraft and environmental hazards. The past failures demonstrate the practical barriers in achieving consistent control especially under dynamic conditions. The recent advancements in MPC, AI, and bio-inspired design offer promising solutions to overcome these limitations. These developments signal a shift toward more intelligent,

adaptive, and sustainable BLC systems, paving the way for broader implementation in aeronautical and engineering designs. It is aimed to continue further research and study to improve and develop towards sustainability.

Table II. The advancements and advantages of BLC.

Advancement	Description	Advantages	Example	References
Model predictive control (MPC)	Mathematically optimizes system performance	Greater accuracy Higher effectiveness in the application of aircraft aerodynamics	Applies MPC to control large-scale motions in turbulent boundary layers over airfoils Integrate machine learning-based MPC to BLC	[40, 41]
Artificial intelligence (AI) and Machine Learning	AI-driven systems analyze data and self-optimize control strategies	High adaptability, learns patterns, reduces inefficiencies	Utilize AI control system on synthetic jets and genetic algorithm-based control unit to achieve drag reduction	[42]
Internet of Thing (IoT) and real-time monitoring	Wireless sensors monitor boundary conditions for autonomous adjustments	Faster response reduced maintenance costs	Lightweight real-time detection network model which is suitable for IoT embedded devices to overcome the limited computing resources and increase real-time monitoring efficiency. Modular and scalable end-to-end architecture tailored for real-time maintenance in IoT settings, data processing and machine learning lifecycle management	[43 - 45]
Vortex generators	Advanced boundary layer control devices with vortex generators helps decrease pressure differential for lift maintenance	Enhance aircraft safety during landing and takeoff Enabling efficient complex flight movements	Non-operating flow surfaces linked to this regeneration system generate additional lift power while stopping airflow stalling	[46]
Systemic boundary layer control methods	Sharp control techniques to interact shockwaves with boundary layers	High efficiency Reliability through minimized impact forces Better energy output for renewable technologies Promote durability of turbine blades	Enable UAVs to maintain stability during fluid flow changes Installation of adaptive BLC systems featuring built-in sensors and actuators	[47, 48]
Bio-inspired renewable energy	Enhanced wind turbines, which decreased the usage of fossil energy sources	Saving fuel expenses Reducing airborne pollutants	Modifying wind turbine blade designs by mimicking of dragonfly wings which can delay stall and reduce post-stall behaviours	[49]

ACKNOWLEDGEMENT

Conceptualization, resources and draft writing, H. Haridharan, A. A. Irfan, A. Shangker, E. L. Andrei, L. Rao and V. Jie; Review writing and editing, Y. C. Y. Evyan and S. Marimuthu. The authors would like to thank the anonymous reviewers for their valuable comments and feedback. The authors were grateful for the collaboration between the Centre for Research and Postgraduate Studies and the School of Aircraft Maintenance, Nilai University.

REFERENCES

- [1] A. Hujjatul, H. Luqman, B. Aris and B. Agus, "Design of Diver Propulsion Vehicle Ganendra RI-1 Using SolidWorks Flow Simulation," *Marin.. and Underwat. Sci. Technol.*, vol 1, no. 2, pp. 55-60, 2015.
- [2] D. Kalvaitis, "Fundamental of Aerodynamics for Pilots," *BAA Training Vietnam*, 2024. [Available online on August 2024] <https://rev.baatraining.com/blog/fundamentals-of-aerodynamics-for-pilots>.
- [3] J. D. Anderson, *Fundamentals of Aerodynamics*, 6th Edn. McGraw-Hill Education, pp. 997-1000, 2017.
- [4] F. Bouderbala, "Passive Flow Control Around A NACA4415 Airfoil by Means of Vortex Generators," *Int. J. Fluid Mechanic. Res.*, vol 52, no. 1, pp. 1-16, 2025.
- [5] H., Shi, "Effect of the Reynolds Number and Clearance Flow on The Aerodynamic Characteristics of A New Variable Inlet Guide Vane," *Aerospace*, vol. 8, no. 7, pp. 172, 2021.
- [6] D. P. Giacomo, B. Matteo, M. Davide, S. Francesco and B. Matteo, "Direct Numerical Simulation of Supersonic Boundary Layers Over A Microramp: Effect of The Reynolds Number," *Phys.: Fluid Dyn.*, *arXiv:2305.10268*, 2023.
- [7] D. Xu, Y. Gu, X. Gao, Z. Ren and J. Chen, "Experimental Investigation on Boundary Layer Control and Pressure Performance for Low Reynolds Flow with Chemical Reaction," *Appl. Sci.*, vol. 13, no. 20, pp. 11335, 2023.

- [8] G. Julian, L. Thibault, S. M. Robert, G. Pierre and B. Reynald, "Experimental and Numerical Investigation of Porous Bleed Control for Supersonic/Subsonic Flows, and Shock-Wave/Boundary-Layer Interactions," *Phys.: Fluid Dyn.*, arXiv:2312.02951, 2023.
- [9] J. G. Leishman, *Introduction to Aerospace Flight Vehicles*, 2nd Edn., Embry-Riddle Aeronautical University, 2023.
- [10] P. Wang, Q. Liu, C. Li, W. Miao, M. Yue and Z. Xu, "Investigation of The Aerodynamic Characteristics of Horizontal Axis Wind Turbine Using An Active Flow Control Method via Boundary Layer Suction," *Renew. Ener.*, vol. 198, pp. 1032-1048, 2022.
- [11] F. Seel, T. Lutz and E. Kramer, "Numerical Study of The Unsteady Blade Root Aerodynamics of A 2 MW Wind Turbine Equipped with Vortex Generators," *Wind Ener. Sci.*, vol. 8, pp. 1369 – 1385, 2023.
- [12] N. Beck, T. Landa, A. Seitz, L. Boermans, Y. Liu and R. Radespiel, "Drag Reduction by Laminar Flow Control," *Energies*, vol. 11, no. 1, pp. 252, 2018.
- [13] I. Dagal, B. Erol, Harrison, A., W. F. Mbasso and Al-W. Ibrahim, "Enhancing Dynamic Control and Stability Assessment of Cessna 172 Aircraft with a PID Controller for New Pilot Trainees," *Int. J. Aeronautic. Space Sci.*, <https://doi.org/10.1007/s42405-025-00899-6>, 2025.
- [14] Q. Sun *et al.*, "Suppression of Flow Separation of A High-Lift Wing with Active Flow Control," *Aerosp. Sci. Technol.*, vol. 159, pp. 110017, 2025.
- [15] X. Li, Y. Zhang and J. Wang, "Research on The Performance of Active-Passive Combined Thermal Protection Systems for High-Speed Aircraft," *Int. J. Heat and Mass Transf.*, vol. 180, pp. 121234, 2025.
- [16] Y. Zhang, X. Li and J. Wang, "Investigation of Blowing and Suction for Turbulent Flow Control on A Flat Plate," *Int. J. Heat and Fluid Flow*, vol. 99, pp. 109123, 2025.
- [17] L. Li, Y. Liang and Z. Tian, Numerical Investigations of Outer-Layer Turbulent Boundary Layer Control for Drag Reduction Through Micro Fluidic-jet Actuators," *Aerosp. Res. Commun.*, vol. 2, no. 1, pp. 12506, 2024.
- [18] A. Sahoo, A. K. Ravishankara, W. Yu, D. Ragni and C. S. Ferreira, "Modelling Vortex Generators Effects on Turbulent Boundary Layers with Integral Boundary Layer Equations," *Wind Ener. Sci. Discuss.*, Preprint wes-2025-69, 2025.
- [19] S. Abdolahiour, "Review on Flow Separation Control: Effects of Excitation Frequency and Momentum Coefficient," *Front. Mechanic. Engin.*, vol. 10, pp. 1380675, 2024.
- [20] M. Y. Andino, L. T. G. Pack Melton, M. Koklu and J. Hannon, "Active Flow Control Enhanced Aileron of the High-Lift Common Research Model," in *AIAA SciTech Forum*, AIAA 2025-1491, 2025.
- [21] A. Wissa, G. Sedky and D. Lentink, "Airplanes of The Future Could Be Fitted with Feather-Like Flaps", *Wired*, 2025. [Available online on 5 March 2025] <https://www.wired.com/story/airplanes-of-the-future-could-be-fitted-with-feather-like-flaps/>.
- [22] N. Kubo, S. Bhandari, M. Tanaka, T. Nonomura and H. Kawabata, "Experimental Parametric Study on Flow Separation Control Mechanisms around NACA0015 Airfoil using A Plasma Actuator with Burst Actuation over Reynolds Numbers of 10^5 – 10^6 ," *Appl. Sci.*, vol. 14, no. 11, pp. 4652, 2024.
- [23] M. Yu, Z. Tao, H. Li and P. Tang, "Optimizing the Landing Stability of Blended-Wing-Body Aircraft with Distributed Electric Boundary-Layer Ingestion Propulsors through A Novel Thrust Control Configuration," *Appl. Sci.*, vol. 14, no. 18, pp. 8546, 2024.
- [24] H. Gao, Y. Liu and T. Zhang, "Suppression of Flow Separation of A High-Lift Wing with Active Flow Control," *Europ. J. Mechanic. - B/Fluids*, vol. 94, pp. 1–12, 2025.
- [25] V. Mosca and A. Elham, "Investigations on The Potentials of Novel Technologies for Aircraft Fuel Burn Reduction through Aerostructural Optimisation," *Aerospace*, vol. 9, no. 12, pp. 744, 2022.
- [26] W. B. Gan, Z. J. Zuo, J. W. Xiang, Z. L. Zhao, J. Cai and M. A. Shang, "Research Progress on Dynamic Stability of Rotating Variant Wing Opening and Closing Process for Aircraft," *J. Beijing Univ. Aeronaut. and Astronaut.*, vol. 50, no. 4, pp. 1053-1064, 2024.
- [27] F. Oz and K. Kara, "Controlling Hypersonic Boundary Layer Transition with Localized Cooling and Meta-Surfaces," *Sci. Rep.*, vol. 14, pp. 15928, 2024.
- [28] H. Chang, "Design Considerations and Strategies for Improving Passenger Comfort through Aeroacoustics," *J. Aeronaut. & Aerosp. Eng.*, vol. 13, no. 2, pp. 342, 2024.
- [29] J. Bouwens, L. Fasulo, S. H. V. Mastrigt, U. W. Schultheis, A. Naddeo and P. Vink, "Being in Control of Noise Levels Improves The Perception of Airplane Seat Comfort," *Aviat. Psychol. and Human Fact.*, vol. 12, no. 1, pp. 1-11, 2021.
- [30] L. Halawi, M. Miller and S. Holley, "Beyond The Blue Skies: A Comprehensive Guide for Risk Assessment in Aviation," *Aeronaut. – Character. and Emer. Technol.*, IntechOpen, pp. 1006687, 2024.
- [31] P. Veillette, "Structural Integrity Factors Can Cause Premature Failure, Part 3," *Aviation Week Network*, 2023.
- [32] S. Gu, C. Breard, Y. Cen, X. Song and Y. Sun, "Wall Pressure Fluctuation on The Aircraft Fuselage: Part 2 Impact of Sensor Wake on the Spectrum," in *Asia-Pacific Int. Symp. Aerosp. Technol. Proc.*, vol. 1050. Springer, Singapore, 2024.
- [33] B. D. Corte, M. Sluis, A. G. Rao and L. L. Veldhuis, "Aerodynamics Performance of An Aircraft with Aft-Fuselage Boundary-Layer-Ingestion Propulsion," *AIAA Aviation 2021 Forum.*, AIAA 2021-2467, 2021.
- [34] G. Fahland, M. Atzori, A. Frede, A. Stroh, B. Frohnapfel and D. Gatti, "Drag Assessment for Boundary Layer Control Schemes with Mass Injection," *Flow Turbul. Combust.*, vol. 113, pp. 119–138, 2024.
- [35] G. Fahland, A. Stroh, B. Frohnapfel, M. Atzori, R. Vinuesa, P. Schlatter and D. Gatti, "Investigation of Blowing and Suction for Turbulent Flow Control on Airfoils," *AIAA Journal*, vol. 59, no. 11, 2021.
- [36] J. Svorcan, J. M. Wang and K.P.Griffin, "Current and Future Trends in Boundary Layer Control on Lifting Surfaces," *Adv. Mechanic. Eng.*, vol. 14, no. 7, 2022.
- [37] W. Liu, X. Fan, D. Huang and Y. Chen, "Effect of Adverse Pressure Gradients on Drag Reduction by Opposition Control in Turbulent Boundary Layers," *Phys.: Fluid Dyn.*, arXiv:2408.15588, 2024.
- [38] X. X. Ji., X. L. Li, F. L. Tong and C. P. Yu, "Large Eddy Simulation of Shock Wave/Turbulent Boundary Layer Interaction under Incipient and Fully Separated Conditions," *Phys. Fluids*, vol. 35, no. 4, pp. 046106, 2023.
- [39] A. Prasannakumar, A. Sudhi, A. Seitz and C. Badrya, "Design of Hybrid-Laminar-Flow-Control Wing and Suction System for Transonic Midrange Aircraft," *JA Aircraft*, vol. 61, no. 3, 2023.
- [40] A. Jariwala, A. Burtsev, S. Suryanarayanan, E. Bakolas and D. B. Goldstein, "Model Predictive Control of Large-Scale Motions for Separated Flow Over An Airfoil," *AIAA SciTech Forum*, AIAA 2025-1302, 2025.
- [41] Z. Wu, P. Christofides, W. Wu, Y. Wang, F. Abdullah, A. Alnajdi and Y. Kadakia, "A Tutorial Review of Machine Learning-Based Model Predictive Control Methods," *Rev. Chem. Eng.*, vol. 41, no. 4, pp. 359–400, 2025.
- [42] J. N. Yu, D. W. Fan and Y. Zhou, "Artificial Intelligence Control of Turbulent Boundary Layer Based on Distributed Synthetic Jets," *Fluid-Structure-Sound Interact. and Contr.*, Singapore, pp. 247–252, 2024.
- [43] R. Chen, P. Wang, B. Lin, L. Wang, X. Zeng, X. Hu, J. Yuan, J. Li, J. Ren, and H. Zhao, "An Optimized Lightweight Real-time Detection Network Model for IoT Embedded Devices," *Sci. Rep.*, vol. 15, pp. 3839, 2025.
- [44] O. Khattach, O. Moussaoui and M. Hassine, "End-to-End Architecture for Real-time IoT Analytics and Predictive Maintenance using Stream Processing and ML Pipelines," *Sensors*, vol. 25, no. 9, pp. 2945, 2025.
- [45] J. Xu, W. Wan, L. Pan, W. Sun and Y. Liu, "The Fusion of Deep Reinforcement Learning and Edge Computing for Real-time Monitoring and Control Optimization in IoT Environments," *Netw. Intern. Architect.*, arXiv:2403.07923, 2024.
- [46] R. Zhao, J. Jiang, H. Feng, T. Liu, W. Wang, M. Shen, D. Chen and Y. Wang, "Researches on Vortex Generators Applied to

- Wind Turbines: A Review,” *Ocean Eng.*, vol. 253, pp. 111266, 2022.
- [47] K. Telli, O. Kraa, Y. Himeur, A. Ouamane, M. Boumehraz, S. Atalla and W. Mansoor, “A Comprehensive Review of Recent Research Trends on Unmanned Aerial Vehicles (UAVs),” *Systems*, vol. 11, no. 8, pp. 400, 2023.
- [48] S. C. Künnecke, S. Vasista, J. Riemenschneider, R. Keimer and M. Kintscher, “Review of Adaptive Shock Control Systems,” *Appl. Sci.*, vol. 11, no. 2, pp. 817, 2021.
- [49] R. Mulligan, “Bio-inspired Aerofoils for Small Wind Turbines,” *Renew. Ener. Pow. Qual. J.*, vol. 18, no. 6, 753-758, 2020.